


2020 TRAILERING GUIDE



SELECTING A VEHICLE/MAXIMUM TRAILER WEIGHT RATINGS	3
VEHICLES AND HITCHES	4
WIRING AND TRAILERING BRAKES	5
TRAILERING BASICS	6
IMPORTANT INFORMATION ABOUT TRAILERING	7
THINGS YOU SHOULD KNOW BEFORE YOU START TRAILERING	8
TRAILERING TECHNOLOGIES	10
CAMERA TECHNOLOGIES	12
SILVERADO 1500 CONVENTIONAL TRAILER WEIGHT RATINGS	15
SILVERADO 1500 FIFTH-WHEEL/GOOSENECK TRAILER WEIGHT RATINGS	16
SILVERADO HD CONVENTIONAL TRAILER WEIGHT RATINGS	17
SILVERADO HD FIFTH-WHEEL/GOOSENECK TRAILER WEIGHT RATINGS	19
COLORADO, SUBURBAN AND TAHOE TRAILER WEIGHT RATINGS	23
TRAVERSE, BLAZER AND EQUINOX TRAILER WEIGHT RATINGS	24
EXPRESS PASSENGER VAN AND EXPRESS CARGO VAN TRAILER WEIGHT RATINGS	25
BOX DELETE, CHASSIS CAB AND EXPRESS CUTAWAY GROSS COMBINATION WEIGHT RATINGS	26
DINGHY TOWING	27
CLOSING REMARKS	28

SELECTING A VEHICLE/MAXIMUM TRAILER WEIGHT RATINGS lb. (kg)¹

The chart below gives you an idea of the maximum amount of weight you can confidently and safely trailer with different 2020 Chevrolet models when your vehicle is properly equipped. See pages 15–25 for maximum trailer weight ratings by specific model.

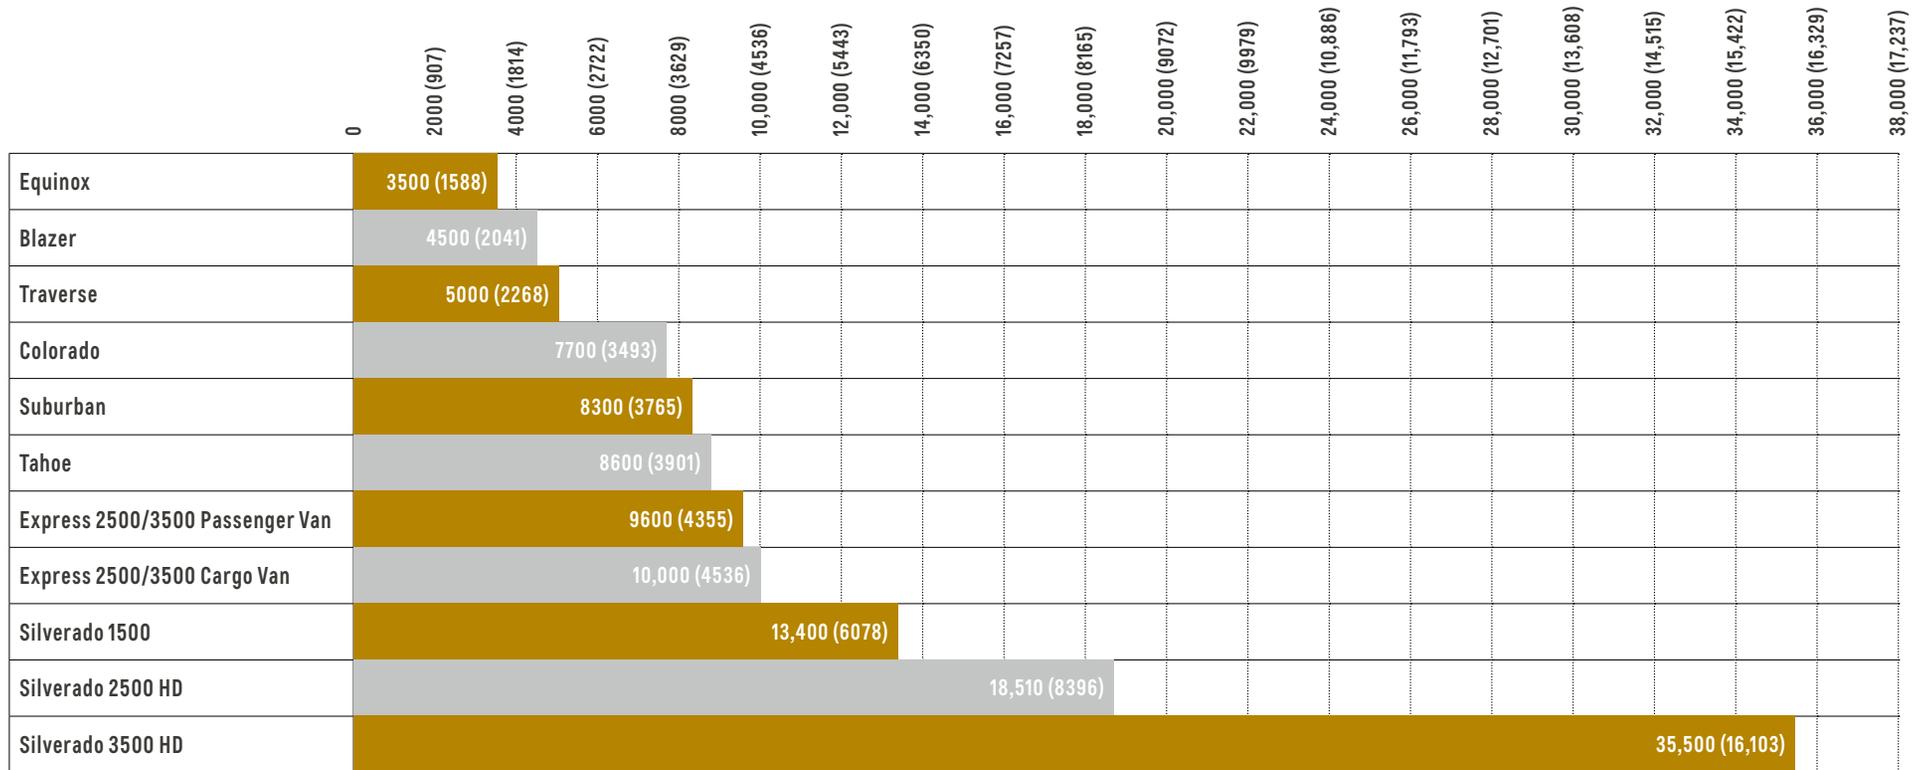

Silverado Series In general, a higher series number in a model indicates a greater load-carrying capacity. In addition, a truck with a higher series number typically has a stronger frame, a stiffer suspension and higher-capacity brakes, increasing the truck’s ability to trailer heavy loads.

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner’s Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow.

Selecting Trailering Equipment Most Chevrolet vehicles offer a variety of standard and available equipment for enhanced trailering performance. Aside from the equipment described below, features such as heavy-duty cooling and extendable trailering mirrors may be available. See your Chevrolet dealer for more information on the model you're interested in.

Selecting the Right Hitch Choosing the right hitch and making the proper electrical connections affects how your vehicle handles, corners and brakes, and allows you to alert other drivers of your intentions. Before selecting a hitch or trailering package, you should be familiar with the weight ratings specific to your Chevrolet vehicle, which are detailed on pages 15–25.

Hitches It's important to have the correct hitch equipment.

- If you'll be towing a trailer that requires a weight-distributing hitch, be sure to use a frame-mounted, weight-distributing hitch¹ and sway control of the proper size
- If you have to make any holes in the body of your vehicle to install a trailer hitch, be sure to seal the holes if you ever remove the hitch. If they're not sealed, dirt, water and deadly carbon monoxide from the exhaust can get into your vehicle

Conventional Hitch This consists of a hitch ball mounted to a receiver or step bumper. Hitch balls are available in a range of sizes. Make sure that the diameter of your hitch ball matches your trailer coupler. Also check that the ball meets or exceeds the gross trailer weight rating.


Weight-Distributing Hitch This hitch type distributes the trailer tongue load by using spring bars to shift some of the hitch weight forward onto the tow vehicle's front axle and rearward to the trailer's axles.

Fifth-Wheel and Gooseneck Hitches These are designed for heavy trailering. Located in the bed of the truck, these hitches position the trailer's kingpin weight over, or slightly in front of, the truck's rear axle. Fifth-wheel and gooseneck hitches are most frequently used with travel trailers, horse trailers and other large trailers.

Fifth-Wheel Trailering Some Silverado models can be equipped with a fifth-wheel or gooseneck trailer hitch.

- Follow the manufacturer's directions for installation, but note that the hitch must be attached to the truck frame. Do not use the pickup bed for additional support. For proper kingpin tongue load distribution and control of the trailer, the hitch must be mounted so the kingpin load is placed over, or slightly in front of, the rear axle centreline
- Fifth-wheel trailer kingpin loads are higher than conventional trailer tongue loads, so pay careful attention to the truck's payload capacity and Rear Gross Axle Weight Rating
- Your Chevrolet dealer can help you calculate the maximum allowable payload and GVWR required for your fifth-wheel trailering application. The weight of any additional equipment and all passengers other than the driver must be subtracted from the payload weight to determine the maximum kingpin load available


CONVENTIONAL HITCHES



Receiver Hitch




Hitch Ball on Step-Bumper




Weight-Distributing Hitch
with Sway Control

HEAVY-DUTY HITCHES



Fifth-Wheel Hitch



Gooseneck Hitch

¹ Not required on Silverado 2500 HD or 3500 HD.

Wiring Harness This allows you to connect the electrical components of your trailer, such as turn signals and brake lights, to the trailering vehicle. Select Silverado models and all Suburban and Tahoe models feature a 7-pin wiring harness to streamline hookup of trailer lighting and brakes, and a bussed electrical centre makes it easier to connect the integrated trailer brake controller.

Trailer Brakes These are required above a 2000 lb. (907 kg) trailer weight on Silverado, Suburban and Tahoe, and above a 1000 lb. (454 kg) trailer weight on all other models. (Brake requirements vary by Province or Territory; consult local laws for actual requirements.) The most common trailer braking systems are surge brakes (found primarily on boat trailers) and electric brakes (often used on travel trailers, horse trailers and car haulers). Surge brakes are a self-contained hydraulic brake system on the trailer, activated during deceleration as the trailer coupler pushes on the hitch ball. An electric trailer brake system uses a brake control unit mounted inside the trailering vehicle; it operates by sensing the vehicle brakes and then applying the trailer brakes.



TRAILER CLASSIFICATION	TYPICAL EXAMPLES	TYPICAL GROSS TRAILER WEIGHT EXAMPLES	TYPICAL HITCH TYPE ¹
Light-Duty (I)	Folding camping trailer, snowmobile trailers and personal watercraft trailers (trailer and cargo combined)	Up to 2000 lb. (907 kg) gross trailer weight	Conventional hitch
Medium-Duty (II)	Single-axle trailers up to 18 ft. (2.4 m), open utility trailers and small speedboat trailers	2001–3500 lb. (908–1588 kg) gross trailer weight	Conventional hitch
Heavy-Duty (III)	Dual- or single-axle trailers, larger boat trailers and enclosed utility trailers	3501–5000 lb. (1588–2268 kg) gross trailer weight	Conventional hitch or weight-distributing hitch
Extra Heavy-Duty (IV)	Two-horse, travel and fifth-wheel recreational trailers	5001–10,000 (2268–4536 kg) gross trailer weight	Conventional hitch, weight-distributing hitch, fifth-wheel hitch or gooseneck hitch
Maximum Heavy-Duty (V)	Largest horse, travel and fifth-wheel recreational or commercial trailers	10,000 (4536 kg) and above gross trailer weight	Conventional hitch, weight-distributing hitch, fifth-wheel hitch or gooseneck hitch

Towing a trailer involves all major vehicle systems of your Chevrolet vehicle. Easy and safe trailering requires a properly equipped vehicle, additional trailering equipment and an appropriate trailer. It also requires loading both the vehicle and trailer properly, using safe driving techniques, meeting Provincial, Territorial and Federal legal requirements, and following break-in and maintenance schedules. The vehicle owner is responsible for obtaining the proper equipment (hitch ball, hitch type of the proper size and capacity) required to safely tow both the trailer and the load that will be towed. For more information, consult your Owner’s Manual or speak to a trailering expert at your Chevrolet dealer. These charts will assist in determining how to best equip your Chevrolet vehicle for trailering. To help you understand the charts, consider these trailering factors:

RGAWR and GVWR Addition of trailer hitch weight cannot cause vehicle weights to exceed the Rear Gross Axle Weight Rating (RGAWR) or the Gross Vehicle Weight Rating (GVWR). These ratings can be found on the certification label located on the driver door or doorframe. Make certain you are aware of your GVWR and any Provincial, Territorial and Federal operating requirements.

GCWR The Gross Combination Weight Rating (GCWR) is the total allowable weight of the completely loaded vehicle and trailer. This rating can be found on the certification label located on the driver door or doorframe. Make certain you are aware of your GVWR and any Provincial, Territorial and Federal operating requirements.

Trailer Weight Rating This rating is determined by subtracting the tow vehicle’s weight (curb weight) from the Gross Combination Weight Rating (GCWR). Base vehicle (curb) weight plus 150 lb. (68 kg) each for the driver and a front passenger is used, so additional passengers, equipment and cargo weight reduce this rating. This rating can be found on the certification label located on the driver door or doorframe.

Axle Ratio In general, a higher axle ratio offers higher trailer weight ratings, quicker acceleration and less fuel efficiency. A lower axle ratio may offer better fuel efficiency and quieter vehicle operation but will have slower acceleration and lower trailer weight ratings.

Note The steps described here are by no means the only precautions to be taken when trailering. See the Owner’s Manual for your Chevrolet vehicle for additional guidelines and trailering tips.

Trailering Caution If you don’t use the correct equipment and drive properly, you can lose control of your vehicle when you pull a trailer. If the trailer is too heavy, your vehicle brakes may be less effective. You and your passengers could be seriously injured. Pull a trailer only after you have read the information in this guide and followed the steps on the following pages.

¹ Represents minimum recommended hitch(es). Please refer to your trailer’s Owner’s Manual or ask your Chevrolet dealer.

The information below is intended to give you some details about the trailer ratings on your vehicle and a way to ensure that the vehicle you use can handle the load you want to pull.

Trailer Weight Ratings and Gross Combination Weight Ratings Chevrolet engineers perform extensive testing of acceleration, handling, braking, and thermal and structural performance to determine the Gross Combination Weight Rating (GCWR) and the trailer weight rating for your vehicle. The GCWR is the total allowable weight of the completely loaded vehicle and trailer including any passengers, cargo, equipment and conversions. You should not exceed the GCWR of your vehicle when you tow a trailer.

Chevrolet also calculates and publishes a trailer weight rating for each model or series of Chevrolet vehicles for comparison purposes. The trailer weight rating is not specific to an individual vehicle and is most useful for comparing product lines to one another to help you select a product that will meet your needs. When you buy a vehicle, you should ensure that the total load (including passengers, cargo and equipment) you intend to pull with it will be less than the trailer weight rating of the vehicle.

Because the trailer weight rating is calculated for a line of vehicles, rather than an individual load situation, some standardized assumptions are made when calculating the trailer weight rating. First, the base curb weight of that type of vehicle is used (the weight of a standard equipped vehicle without any options). Second, it is assumed that there is only a driver and a front passenger, each weighing 150 lb. (68 kg). Third, it is assumed there is a certain tongue weight for the load (a tongue

weight is the weight of only the tongue of the loaded trailer). For conventional trailering, a tongue weight that is 10% of the loaded trailer weight is used. For fifth-wheel/gooseneck trailering, a tongue weight that is a minimum of 15% of the loaded trailer weight is used.

How to Keep Your Load Within the Capabilities of Your Vehicle It is important that the combination of the tow vehicle and trailer does not exceed any of its weight ratings – GCWR, GVWR, RGAWR, trailer weight rating or tongue weight. The only way to be sure to not exceed any of these ratings is to weigh the tow vehicle and trailer combination, fully loaded for the trip, getting individual weights for each of these items. You can then subtract the weight of your vehicle from the GCWR. The difference between the two is the capacity you have available for your cargo, passengers, trailer, load and any other equipment you might use to set up your trailer. Put another way, your GCWR should always be greater than or equal to the weight of your vehicle, passengers, cargo, trailer (with equipment) and load.

The tongue weight for your trailer is the downward force of the coupler of the trailer on the vehicle hitch. You can calculate the tongue weight by placing the tongue of the trailer on an appropriate scale. For conventional trailering, the tongue weight should be 10% to 15% of the loaded trailer weight. For fifth-wheel/gooseneck trailering, the tongue weight should be a minimum of 15% of the loaded trailer weight.

The GVWR is the maximum amount the vehicle itself should weigh, including the as-equipped weight of the vehicle plus the cargo, passengers and trailer tongue weight. Put another way, the GVWR should always be greater than or equal to the weight of your vehicle, passengers, cargo and tongue weight.

BEFORE YOU TRAILER

Safety Chains Always attach safety chains between your vehicle and your trailer and cross them under the tongue of the trailer so that the tongue will be less likely to drop if the trailer should separate from the hitch. Leave enough slack in the chains so you can corner without the chains impeding the movement of the trailer. Do not allow safety chains to drag on the ground.

Loading Your Trailer Load your trailer to attain a 10%–15% tongue weight. Some specific trailer types (especially boat trailers) fall outside of this range. In these cases, the recommended tongue weight listed in the trailer Owner's Manual should be observed. A good rule of thumb is to distribute 60% of the load over the front half of the trailer and evenly from side to side. Loads sitting either too far forward or too far back in the trailer can create unstable trailering conditions – such as trailer sway – at highway speeds and during heavy braking. Once the trailer has been loaded and the weight is distributed properly, all cargo should be secured to prevent the load from shifting.

Safety Checklist Before starting out on a trip, double-check the hitch and platform, the hitch nuts and bolts, mirror adjustments, safety chains, and vehicle and trailer lights. Make sure that a sway-control device is installed, if required, and that the device is working properly. Check tire pressure on both the tow vehicle and the trailer. If your trailer has electric brakes, test them by manually engaging the brake controller while the vehicle is moving slowly. Check to see that the breakaway switch, if available, is connected and functioning properly. Finally, make certain that all loads are secure.

ON THE ROAD

Accelerating/Braking Avoid overworking your engine when trailering by applying gradual pressure on the accelerator. Allow your vehicle to safely reach a comfortable driving speed. Give yourself extra time and room when merging onto highways. Braking when pulling a trailer requires extra distance. Allow ample room to come to a safe stop. A good measure for determining a safe following distance is to allow one vehicle and trailer length between you and the vehicle ahead of you for every 16 km/h of speed. When braking, use firm, steady pressure on the brake pedal.

Controlling Trailer Sway Sway refers to instability of the trailer relative to the tow vehicle, and often results from improper weight distribution, excessive speed or

overloading. Other factors that can cause sway are crosswinds, poor vehicle maintenance and road conditions. Trying to steer out of sway will likely make it worse. Speed is a major contributor to trailer sway, so you need to slow the vehicle – braking, however, could lead to a jackknife or other loss of control. To help control sway, follow these steps:

- Hold the steering wheel as steady as possible
- Release the accelerator but do not touch the brake pedal
- Activate electric trailer brakes (if equipped) by hand, until the sway condition stops
- Use the vehicle brakes to come to a complete stop

You should pull your vehicle to the side of the road and attempt to determine the cause of the instability. Check the cargo load for shifting and improper weight distribution. Check tire pressure on the tow vehicle and trailer and the condition of the suspension and shocks. If the sway was caused by strong winds, wait for conditions to improve before continuing your trip.

Finally, some trailers can be equipped with anti-sway devices. Contact the manufacturer of your trailer for availability.

Cornering The turning radius of a trailer is typically much smaller than that of your vehicle; therefore, a trailer may hit soft shoulders, curbs, trees or other objects when making tight turns. Taking turns sharply can also cause the trailer to strike against and damage the tow vehicle. When approaching a sharp corner, brake sooner than normal to reduce vehicle speed before entering the turn. Drive the vehicle slightly past the normal turning point then firmly turn the steering wheel. By cornering at a wider angle, both the vehicle and trailer should safely clear the inside of the turn.

Passing When passing, allow additional time and distance to safely pass the other vehicle. Signal your intention to pass well in advance and, when reentering the lane after passing, make certain your trailer is clear of the vehicle you have passed. Never pass on hills or around curves.

Backing Up To back up a trailer, place one hand at the six o'clock position on the steering wheel. To move the trailer to the left, move your hand to the left. To move the trailer to the right, move your hand to the right. Back up slowly and move the steering wheel in small increments to help maintain control. To assist in backing up, it is helpful to have someone outside the vehicle to guide you. Make certain you can see your spotter at all times.

Driving on Grades Before going down a steep grade, reduce your speed and shift the transmission into a lower gear. This provides “engine braking” and reduces the need to brake for long periods. See your dealer or Owner’s Manual for additional information on engine grade braking. When driving up a steep incline, shift to a lower gear for more torque to maintain speed and avoid lugging. Lugging occurs when the vehicle’s engine stutters because it needs to be in a lower gear. Crest the hill no faster than the speed at which you want to descend and in the gear you expect will require little braking. Pay attention to your temperature gauges for any signs of overheating.

Overheating Prolonged driving with overheated fluids can cause damage to your vehicle. If temperature gauges register abnormally high, if there is a marked decrease in power or if you hear unusual engine noises, immediately take the following steps:

- Pull your vehicle to the side of the road. Once stopped, shift into Park and apply the parking brake. Leave the engine running
- Turn off air conditioning and other accessories to reduce load on the engine. Roll down the windows and turn the heater on to maximum and the fan to its highest setting. The heater core provides a second cooling surface that can help reduce engine temperatures
- If you suspect that the overheating is the result of climbing a long, steep grade, run the engine at fast idle (around 1500 rpm) until the temperature gauge registers a normal reading
- With the vehicle in Park, the parking brake engaged, and being mindful of traffic, exit your vehicle and look for steam or leaking coolant underneath the engine. If you see either of these, shut off the engine and allow the engine to cool. To avoid being burned, do not attempt to remove the radiator cap until the engine has cooled

Parking on Grades Parking on steep grades with a trailer is not recommended; if you must, follow this procedure:


- Apply the brakes and shift into Neutral
- Have someone place trailer wheel blocks on the downgrade side
- Release the brakes until the blocks absorb the load
- Apply the parking brake and shift into Park

Leaving Your Parking Spot on Grades

- Hold the brake pedal down and start the engine
- Shift into gear and release the parking brake
- Release the brake pedal and drive uphill slightly until free from the blocks
- Apply the brakes and have someone retrieve the blocks

Diesel Engine After-Run Diesel Engine After-Run on Silverado 2500 HD, 3500 HD and 3500 HD Chassis Cab is designed to help the engine cool down following heavy usage. If the vehicle is shut off while the engine is too hot, it will immediately restart, allowing the engine fan to run and coolant to flow.

Trailer Label This industry-first label is located on the driver-side door jamb and provides information that’s specific to your vehicle and vital to towing, including GVWR¹, GCWR², GAWR³ for the rear axle, maximum payload, maximum tongue weight and curb weight. Available on Silverado 1500, 2500 HD and 3500 HD.

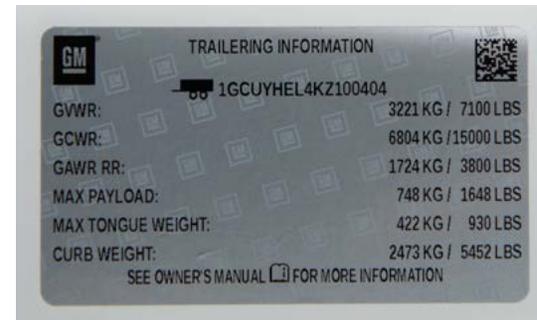

¹ Gross Vehicle Weight Rating (GVWR). When properly equipped; includes weight of vehicle, passengers, cargo and equipment. ² Gross Combination Weight Rating. ³ Gross Axle Weight Rating.

Trailer Packages The trailering package will vary by vehicle and may include a trailer hitch platform and other trailering equipment. Please see specific vehicle catalogs or your dealer for details.

StabiliTrak® Electronic Stability Control StabiliTrak helps improve vehicle stability, particularly during emergency manoeuvres. The StabiliTrak control module compares your steering input with the vehicle's actual response and then, if necessary, makes small, individual brake and engine torque applications to enhance control and help you keep on track. StabiliTrak automatically intervenes when it senses loss of lateral traction.

Trailer Sway Control Working in conjunction with the StabiliTrak Electronic Stability Control System and integrated trailer brake controller (if equipped), the Trailer Sway Control feature on Silverado 1500, 2500 HD and 3500 HD, Suburban and Tahoe can sense trailer sway and can automatically apply the vehicle and trailer brakes and reduce engine power, if necessary, to help you get back on track.

Hill Start Assist On inclines greater than a 5% grade, Hill Start Assist automatically engages to hold the vehicle stationary for about a second, allowing the driver time to press the accelerator before the vehicle can roll backward. It can be extremely helpful when you're stopped on a steep grade with a vehicle behind you. The available integrated trailer brake controller will also assist with this feature and apply the trailer brakes.

Integrated Trailer Brake Controller This is optional on Silverado, Silverado HD, Colorado, Suburban and Tahoe. Completely integrated within the electrical system, Anti-lock Braking System (ABS) and StabiliTrak, it allows your trailer's brakes to operate simultaneously with the vehicle's brakes.

Rear Vision Camera¹ This feature is designed to allow the driver to use the touch-screen display (if equipped) or the interior rear-view mirror to see certain stationary obstacles located behind the vehicle when travelling in Reverse at low speeds. This feature is especially helpful when backing up to hitch your trailer.

Technology Package This available system integrates multiple cameras and provides up to 15 views of the areas around your vehicle and trailer. These views make it easier to hitch a trailer and provide greater confidence while towing. Available on Silverado and Silverado HD. Learn more on pages 12–14.

Tow/Haul Mode Standard Tow/Haul mode on Express, Silverado, Silverado HD, Suburban and Tahoe as well as available Tow/Haul mode on Colorado;² Traverse;³ Blazer⁴ and Equinox⁵ adjusts the shift schedule in the automatic transmission so it isn't "hunting" for the correct gear while towing or trailering.

Automatic Engine Grade Braking Standard on Equinox, Blazer and Traverse, this feature works to help maintain vehicle speed on long, steep grades.

Cruise Grade Braking Included with all available transmissions on Silverado and Silverado HD, the cruise grade braking feature automatically downshifts to help slow the truck and preserve your brake pads on long, steep descents.

Diesel Exhaust Brake The Diesel Exhaust Brake on Silverado HD works with the available Allison® transmission and the Tow/Haul mode and auto grade braking features. After adjusting for the load and grade, a variable vane geometry turbo creates back pressure to slow the vehicle and help reduce brake use. That means reduced brake fade, prolonged brake life and more confidence when you're pulling up to 35,500 lb. (16,103 kg);⁶ especially on steep grades, increasing the vehicle's ability to trailer heavy loads. An exhaust brake system is also included on Colorado and Express models with the available Duramax® 2.8L I-4 Turbo-Diesel engine and Silverado 1500 with the available Duramax 3.0L I-6 Turbo-Diesel engine.

Automatic Locking Rear Differential This GM-exclusive feature sends maximum drive power to the wheel with grip in low-speed situations when rear-wheel slippage happens. Available on Colorado, Express, Silverado, Silverado HD, Suburban and Tahoe.

¹ Safety or driver assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. The driver should remain attentive to traffic, surroundings and road conditions at all times. Visibility, weather and road conditions may affect feature performance. Read the vehicle Owner's Manual for more important feature limitations and information. ² With available 3.6L V6 engine or Duramax 2.8L I-4 Turbo-Diesel engine. ³ With available trailering equipment. ⁴ Requires available AWD. ⁵ Requires available 2.0L engine. ⁶ Requires Silverado 3500 HD Regular Cab WT 2WD DRW with available Duramax 6.6L V8 Turbo-Diesel engine and gooseneck hitch. Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow.

Digital Variable Steering Assist This advanced system delivers enhanced control on the highway and in the parking lot. It provides ease of handling, stability at high speeds, manoeuvrability at low speeds, and excellent feel and response. Standard on Silverado HD LTZ and High Country.

Park Grade Hold Assist The Electric Parking Brake introduces Park Grade Hold Assist, which enhances Hill Hold to help keep your truck firmly in place on inclines or declines of 8% or more. It also keeps the transmission linkage from binding so you can more easily shift into gear after being parked on a steep grade. Standard on Silverado HD.

Extendable Trailing Mirrors These vertical manual-folding and extendable mirrors have 323 cm² (50 in²) of flat mirror surface and 129 cm² (20 in²) of convex mirror surface to help you see what's happening around you. They are available on most Silverado 1500 models, and standard on all Silverado 2500 HD and 3500 HD models.

Max Trailing Package Available on select Silverado 1500 models and available on all Suburban and Tahoe models, the Max Trailing Package offers increased towing capability over the standard trailing package. See dealer for details.

Hitch Guidance with Hitch View¹ A dynamic guiding line is integrated onto the image when you select available Hitch Guidance on the Rear Vision Camera¹ screen. As an enhancement, available Hitch View allows you to zoom in on the hitch for a top-down view, making it easier to hook up your trailer on your own.


Auto Electric Parking Brake This industry-first feature automatically engages the parking brake when you shift into Park after you engage available Hitch View, helping to prevent any unintentional roll so your trailer and hitch stay in alignment. Available on Silverado and Silverado HD.

Trailer Theft Alert With this available industry-first feature, if the harness on your attached trailer is disconnected, the lights will flash and the horn will sound. In addition, if you have an active OnStar[®] Safety & Security Plan² and are enrolled in Theft Alarm Notification, you can receive a notification by text or email, based on your communication preference. Available on Silverado and Silverado HD.

In-Vehicle Advanced Trailing System With this available system you can create profiles for a number of trailers and also keep track of various trailer metrics. It also allows you to set maintenance reminders and conduct a trailer light test and more.

Trailer Tire Pressure Monitoring System When you install the sensors, this available feature checks trailer tires for proper inflation and temperature.³ Available on Silverado and Silverado HD.

myChevrolet™ App⁴ with Trailing⁵ This industry-first app includes predeparture checklists, a glossary of trailing terms, how-to videos, trailer light tests and more.

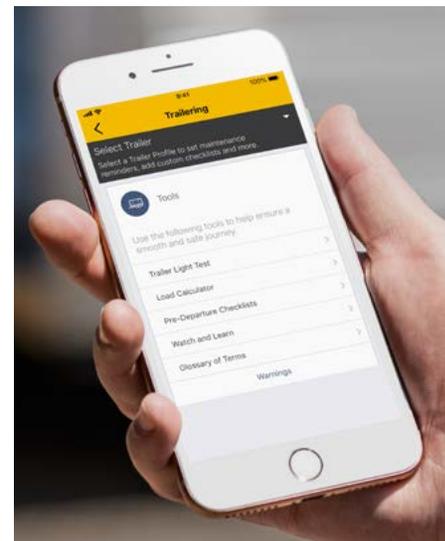

¹ Safety or driver assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. The driver should remain attentive to traffic, surroundings and road conditions at all times. Visibility, weather and road conditions may affect feature performance. Read the vehicle Owner's Manual for more important feature limitations and information. ² Requires vehicle electrical system (including battery), wireless service and GPS satellite signal to be available and operating for features to function properly. Services are subject to user terms and limitations and vary by model and/or vehicle configuration. Not all vehicles may transmit all crash data. OnStar acts as a link to existing emergency service providers; OnStar Emergency Advisors are certified by the International Academies of Emergency Dispatch. Roadside service provided by Allstate Roadside Services, and limitations and restrictions apply. Stolen Vehicle Assistance requires armed factory-installed theft-deterrent system and selection of notification communication preference(s); these services are intended to assist with vehicle recovery and do not prevent theft or protect against damage or loss; additional messaging and data rates may apply. Visit onstar.ca for more details. ³ Does not monitor spare tire. ⁴ Available on select Apple and Android devices. Service availability, features and functionality are subject to limitations and vary by model and/or vehicle configuration, device and the plan in which you are enrolled. Device data connection required. Visit onstar.ca for more details. ⁵ Device data connection required. Available on select Apple and Android devices. Some features require connected vehicle services trial or active plan and working electrical system. Service availability, features and functionality vary by model and/or vehicle configuration.

Select models of the 2020 Silverado 1500 and Silverado HD offer a **Technology Package**¹ that provides multiple camera views – up to 15 total views with available accessory cameras – to help make it easier to hitch a trailer and tow with confidence.

Views enabled by these cameras are easily accessed by selecting the Camera App on the touch-screen display. Conveniently, select views can be launched through the available **Advanced Trailering System**.



Bed View Allows you to see inside the cargo bed to help with fifth-wheel or gooseneck hitching and to briefly check on cargo.



Front Side View Shows the position of the front tires when parking and during tight manoeuvres.



Transparent Trailer Helps the driver to virtually “see through” a conventional hitched box or camping trailer. This camera view is able to remain on while vehicle is in motion.



Hitch View Provides a close-up view of the receiver hitch to help with alignment when connecting to a trailer.



Rear Side View Provides a line of sight down each side of the truck and trailer. This camera view is able to remain on while vehicle is in motion.

¹ Available on LTZ and High Country models only.



Rear Trailer View Uses an available accessory camera that can be installed to show vehicles or objects behind the trailer. This camera view is able to remain on while vehicle is in motion.



Inside Trailer View Allows the driver to monitor trailer contents or cargo using an available accessory camera that can be installed in the trailer.



Pic-In-Pic Side View Combines two views – the Rear Side View and the Rear Trailer View. Requires available accessory camera. This camera view is able to remain on while vehicle is in motion.



Rear Camera Mirror An available dual-function camera-based rear-view mirror that provides a wider, less-obstructed field of view than a traditional rear-view mirror. This camera view is able to remain on while vehicle is in motion.



Front Camera View Displays front view with available guidelines to assist with parking and tight manoeuvres.



Rear Camera View Displays rear view to assist with parking and tight manoeuvres.

Some camera views require available accessory camera and installation. Not compatible with all trailers. See your dealer for details. Driver assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. The driver should remain attentive to traffic, surroundings and road conditions at all times. Visibility, weather and road conditions may affect feature performance. Read the vehicle Owner's Manual for more important feature limitations and information.



Surround View Gives a top-down bird's-eye view of the truck's surroundings.



Bowl View Provides a rear-facing 3-D surround view, useful for low-speed backing manoeuvres.



Front Top-Down View Provides a top-down view of the hood, bumper and front tires for tight manoeuvres in parking lots or along curbs.



Rear Top-Down View Shows the clearance between the truck bed and nearby objects.

Do not exceed the trailer weight rating! For more information, ask your Chevrolet dealer.

SILVERADO 1500 CONVENTIONAL TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	REGULAR CAB		DOUBLE CAB		CREW CAB			
			LONG BED 2WD	LONG BED 4x4	STANDARD BED 2WD	STANDARD BED 4x4	SHORT BED 2WD	SHORT BED 4x4	STANDARD BED 2WD	STANDARD BED 4x4
4.3L V6	3.42	12,800 (5806)	7900 (3583)	7700 (3493)	7700 (3493)	7500 (3402)	7700 (3493)	7500 (3402)	7600 (3447)	7400 (3357)
4.3L V6 Trail Boss	3.42	12,800 (5806)	-	-	-	7400 (3357)	-	7400 (3357)	-	7300 (3311)
5.3L V8 (with 6-speed)	3.42	15,000 (6804)	10,000 (4536)	9800 (4445)	9700 (4400)	9500 (4309)	9700 (4400)	9500 (4309)	9600 (4354)	9500 (4309)
5.3L V8 (with 6-speed) Trail Boss	3.42	15,000 (6804)	-	-	-	9500 (4309)	-	9500 (4309)	-	9400 (4264)
2.7L Turbo	3.42	12,000 (5443)	-	-	6800 (3084)	6600 (2994)	6800 (3084)	6600 (2994)	6800 (3084)	6600 (2994)
5.3L V8 (with 8-speed)	3.23	15,000 (6804)	-	-	9800 (4445)	9600 (4355)	9800 (4445)	9600 (4355)	9700 (4400)	9500 (4309)
5.3L V8 (with 10-speed)	3.23	15,000 (6804)	-	-	-	-	-	9300 (4218)	-	9200 (4173)
5.3L V8 (with 8-speed) and Max Trailering Package	3.42	16,800 (7620)	-	-	11,600 (5262)	11,400 (5171)	11,500 (5216)	11,300 (5126)	11,400 (5171)	11,300 (5126)
5.3L V8 (with 10-speed) Trail Boss	3.23	15,000 (6804)	-	-	-	-	-	9400 (4264)	-	9400 (4264)
6.2L V8	3.23	15,000 (6804)	-	-	-	9300 (4218)	-	9200 (4173)	-	9100 (4128)
6.2L V8 and Max Trailering Package	3.42	17,800 (8074)	-	-	-	12,100 (5489)	-	12,000 (5443)	-	11,900 (5398)
6.2L V8 RST (20-inch wheels) and Max Trailering Package	3.42	19,100 (8664)	-	-	-	13,400 (6078)	-	-	-	-
6.2L V8 Trail Boss	3.23	15,000 (6804)	-	-	-	9300 (4218)	-	9300 (4218)	-	9300 (4218)
Duramax 3.0L I-6 Turbo-Diesel	3.23	13,000 (5897) - 2WD 15,000 (6804) - 4x4	-	-	7600 (3447)	9300 (4218)	7600 (3447)	9300 (4218)	-	9200 (4173)

General Trailering Notes Where available, the Trailering Package (Z82) provides a trailer hitch platform and 7-pin and 4-pin sealed connectors at the rear bumper.

Trailer Tongue Weight Notes Trailer tongue weight should be 10% to 15% of total loaded trailer weight up to 1250 lb. (567 kg). The addition of trailer tongue weight must not cause vehicle to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR).



¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

Do not exceed the trailer weight rating! For more information, ask your Chevrolet dealer.

SILVERADO 1500 FIFTH-WHEEL/GOOSENECK TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	REGULAR CAB		DOUBLE CAB		CREW CAB	
			LONG BED 2WD	LONG BED 4x4	STANDARD BED 2WD	STANDARD BED 4x4	STANDARD BED 2WD	STANDARD BED 4x4
4.3L V6	3.42	12,800 (5806)	7800 (3538)	7600 (3447)	7600 (3447)	7400 (3357)	7500 (3402)	7300 (3311)
4.3L V6 Trail Boss	3.42	12,800 (5806)	-	-	-	7300 (3311)	-	7200 (3266)
5.3L V8 (with 6-speed)	3.42	15,000 (6804)	9900 (4491)	9700 (4400)	9600 (4355)	9300 (4218)	9600 (4355)	9400 (4264)
5.3L V8 (with 6-speed) Trail Boss	3.42	15,000 (6804)	-	-	-	8500 (3856)	-	8900 (4037)
2.7L Turbo	3.42	12,000 (5443)	-	-	6800 (3084)	6600 (2994)	6700 (3039)	6500 (2948)
5.3L V8 (with 8-speed)	3.23	15,000 (6804)	-	-	9700 (4400)	9500 (4309)	9600 (4355)	9400 (4264)
5.3L V8 (with 10-speed)	3.23	15,000 (6804)	-	-	-	-	-	8000 (3629)
5.3L V8 (with 8-speed) and Max Trailering Package	3.42	16,800 (7620)	-	-	11,500 (5216)	11,300 (5126)	10,990 (4944)	11,200 (5080)
5.3L V8 (with 10-speed) Trail Boss	3.23	15,000 (6804)	-	-	-	-	-	8600 (3901)
6.2L V8	3.23	15,000 (6804)	-	-	-	7700 (3493)	-	7700 (3493)
6.2L V8 and Max Trailering Package	3.42	17,800 (8074)	-	-	-	10,100 (4581)	-	9000 (4082)
6.2L V8 RST (20-inch wheels) and Max Trailering Package	3.42	19,100 (8664)	-	-	-	10,300 (4672)	-	-
6.2L V8 Trail Boss	3.23	15,000 (6804)	-	-	-	8400 (3810)	-	8400 (3810)
Duramax 3.0L I-6 Turbo-Diesel	3.23	13,000 (5897) - 2WD 15,000 (6804) - 4x4	-	-	7500 (3402)	8700 (3946)	7400 (3357)	7100 (3221)

Fifth-Wheel/Gooseneck Kingpin Weight Notes Fifth-wheel or gooseneck kingpin weight should be 15% of total loaded trailer weight. The addition of trailer kingpin weight cannot cause vehicle to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). These ratings can be found on the certification label located on the driver door or doorframe. A fifth-wheel hitch is offered on specific models and is also available as a dealer-installed accessory on select models. See the Trailering Basics on page 6 for more trailering information.

Fifth-Wheel/Gooseneck Trailering Notes Silverado can be equipped with a fifth-wheel or gooseneck trailer hitch. Follow the manufacturer’s directions for

installation, but note that the hitch must be attached to the truck frame. Do not use the pickup bed for additional support. For proper kingpin tongue load distribution and control of the trailer, the hitch must be mounted so the kingpin load is placed over, or slightly in front of, the rear axle centreline. Fifth-wheel trailer kingpin loads are higher than conventional trailer tongue loads, so pay careful attention to the truck’s payload capacity and Rear Gross Axle Weight Rating. Your Chevrolet dealer can help you calculate the maximum allowable payload and GVWR required for your fifth-wheel trailering application. The weight of any additional equipment and all passengers must be subtracted from the payload weight to determine the maximum kingpin load available.

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner’s Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

Do not exceed the trailer weight rating.¹ For more information, ask your Chevrolet dealer.

SILVERADO 2500 HD AND 3500 HD CONVENTIONAL TRAILER WEIGHT RATINGS lb. (kg)¹

				REGULAR CAB					
ENGINE	AXLE RATIO	GCWR ²	WHEEL SIZE	2500 HD LONG BED 2WD	2500 HD LONG BED 4x4	3500 HD LONG BED 2WD SRW	3500 HD LONG BED 4x4 SRW	3500 HD LONG BED 2WD DRW	3500 HD LONG BED 4x4 DRW
6.6L V8 Gas	3.73	24,000 (10,886)	17"/18"	14,500 (6577)	14,500 (6577)	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	17"	-	-	-	-	16,800 (7620)	16,800 (7620)
6.6L V8 Gas	3.73	24,000 (10,886)	18"/20"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	17"	14,500 (6577)	14,500 (6577)	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	18"/20"	14,500 (6577)	14,500 (6577)	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	18"/20"	-	-	14,500 (6577)	14,500 (6577)	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	40,000 (18,144)	17"	-	-	-	-	-	20,000 (9072)
Duramax 6.6L V8 Turbo-Diesel	3.42	43,500 (19,731)	17"	-	-	-	-	20,000 (9072)	-

				DOUBLE CAB							
ENGINE	AXLE RATIO	GCWR ²	WHEEL SIZE	2500 HD STANDARD BED 2WD	2500 HD STANDARD BED 4x4	2500 HD LONG BED 2WD	2500 HD LONG BED 4x4	3500 HD LONG BED 2WD SRW	3500 HD LONG BED 4x4 SRW	3500 HD LONG BED 2WD DRW	3500 HD LONG BED 4x4 DRW
6.6L V8 Gas	3.73	24,000 (10,886)	17"/18"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	17"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-	16,400 (7439)	16,390 (7434)
6.6L V8 Gas	3.73	24,000 (10,886)	18"/20"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	17"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	18"/20"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	18"/20"	-	-	-	-	14,500 (6577)	14,500 (6577)	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	40,000 (18,144)	17"	-	-	-	-	-	-	20,000 (9072)	20,000 (9072)

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

Do not exceed the trailer weight rating.¹ For more information, ask your Chevrolet dealer.

SILVERADO 2500 HD AND 3500 HD CONVENTIONAL TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	WHEEL SIZE	CREW CAB										
				2500 HD STANDARD BED 2WD	2500 HD STANDARD BED 4x4	2500 HD LONG BED 2WD	2500 HD LONG BED 4x4	3500 HD STANDARD BED 2WD SRW	3500 HD STANDARD BED 4x4 SRW	3500 HD LONG BED 2WD SRW	3500 HD LONG BED 4x4 SRW	3500 HD LONG BED 2WD DRW	3500 HD LONG BED 4x4 DRW	
6.6L V8 Gas	3.73	24,000 (10,886)	17"/18"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	17"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-	-	-	-	16,300 (7394)	16,300 (7394)
6.6L V8 Gas	3.73	24,000 (10,886)	18"/20"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	17"	14,500 (6577)	14,500 (6577)	14,500 (6577)	14,500 (6577)	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	27,500 (12,474)	18"/20"	18,500 (8392)	18,500 (8392)	18,500 (8392)	18,500 (8392)	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	18"/20"	-	-	-	-	20,000 (9072)	20,000 (9072)	20,000 (9072)	20,000 (9072)	20,000 (9072)	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	40,000 (18,144)	17"	-	-	-	-	-	-	-	-	-	20,000 (9072)	20,000 (9072)

General Trailering Notes The standard Trailering Package (Z82) provides a trailer hitch platform and a 7-pin sealed connector at the rear bumper. A gooseneck/fifth-wheel bed-mounted 7-pin wiring harness (similar to UY2 harness) is also available and requires the Gooseneck/5th-Wheel Package (CMT).

Automatic Transmission Model Note All models are equipped with an engine oil cooler (KC4) and an oil-to-air transmission oil cooler (KNP).

Trailer Tongue Weight Notes Trailer tongue weight should be 10% to 15% of total loaded trailer weight up to 2000 lb. (907 kg). The addition of trailer tongue weight must not cause vehicle to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR).



¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

Do not exceed the trailer weight rating.¹ For more information, ask your Chevrolet dealer.

SILVERADO 2500 HD AND 3500 HD FIFTH-WHEEL/GOOSENECK TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	GVWR	WHEEL SIZE	REGULAR CAB					
					2500 HD LONG BED 2WD	2500 HD LONG BED 4x4	3500 HD LONG BED 2WD SRW	3500 HD LONG BED 4x4 SRW	3500 HD LONG BED 2WD DRW	3500 HD LONG BED 4x4 DRW
6.6L V8 Gas	3.73	24,000 (10,886)	9900 (4490)	17"/18"	17,370 (7879)	17,060 (7738)	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,250 (4649)	17"	-	17,060 (7738)	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,150 (4604)	18"/20"	17,340 (7865)	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,450 (4740)	18"/20"	-	17,030 (7725)	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,750 (4876)	18"/20"	-	-	17,200 (7802)	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	11,100 (5035)	18"/20"	-	-	-	16,950 (7688)	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	14,000 (6350)	17"	-	-	-	-	16,800 (7620)	16,710 (7580)
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	10,550 (4763)	17"	18,510 (8396)	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	10,900 (4944)	17"	-	18,190 (8251)	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	10,750 (4876)	18"/20"	18,480 (8382)	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	11,025 (5001)	18"/20"	-	18,160 (8237)	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	11,500 (5216)	18"/20"	-	-	21,500 (9752)	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	11,800 (5352)	18"/20"	-	-	-	21,500 (9752)	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	40,000 (18,144)	14,000 (6350)	17"	-	-	-	-	-	31,760 (14,406)
Duramax 6.6L V8 Turbo-Diesel (5th-Wheel)	3.42	43,500 (19,731)	14,000 (6350)	17"	-	-	-	-	32,000 (14,515)	-
Duramax 6.6L V8 Turbo-Diesel (Gooseneck)	3.42	43,500 (19,731)	14,000 (6350)	17"	-	-	-	-	35,500 (16,103)	-

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

Do not exceed the trailer weight rating!¹ For more information, ask your Chevrolet dealer.

SILVERADO 2500 HD AND 3500 HD FIFTH-WHEEL/GOOSENECK TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	GVWR	WHEEL SIZE	DOUBLE CAB							
					2500 HD STANDARD BED 2WD	2500 HD STANDARD BED 4x4	2500 HD LONG BED 2WD	2500 HD LONG BED 4x4	3500 HD LONG BED 2WD SRW	3500 HD LONG BED 4x4 SRW	3500 HD LONG BED 2WD DRW	3500 HD LONG BED 4x4 DRW
6.6L V8 Gas	3.73	24,000 (10,886)	9900 (4490)	17"/18"	17,050 (7734)	-	16,930 (7679)	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,050 (4559)	17"	17,050 (7734)	-	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,200 (4627)	17"	-	-	16,930 (7679)	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,350 (4695)	17"	-	16,740 (7593)	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,500 (4763)	17"	-	-	-	16,650 (7552)	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,250 (4649)	18"/20"	17,000 (7711)	-	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,400 (4717)	18"/20"	-	-	16,900 (7666)	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,550 (4763)	18"/20"	-	16,710 (7580)	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,750 (4876)	18"/20"	-	-	-	16,620 (7539)	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	11,100 (5035)	18"/20"	-	-	-	-	16,700 (7575)	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	11,400 (5171)	18"/20"	-	-	-	-	-	16,500 (7484)	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	14,000 (6350)	17"	-	-	-	-	-	-	16,400 (7439)	16,270 (7380)
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	10,700 (4854)	17"	18,200 (8255)	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	10,900 (4944)	17"	-	-	18,040 (8183)	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	11,000 (4990)	17"	-	17,890 (8115)	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	11,200 (5080)	17"	-	-	-	17,750 (8051)	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	10,900 (4944)	18"/20"	18,170 (8242)	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	11,100 (5035)	18"/20"	-	-	18,010 (8169)	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	11,200 (5080)	18"/20"	-	17,860 (8101)	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	11,450 (5194)	18"/20"	-	-	-	17,720 (8038)	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	11,850 (5375)	18"/20"	-	-	-	-	21,490 (9748)	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	12,150 (5557)	18"/20"	-	-	-	-	-	21,210 (9621)	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	40,000 (18,144)	14,000 (6350)	17"	-	-	-	-	-	-	31,500 (14,288)	31,340 (14,216)

General Trailering Notes The standard Trailering Package (Z82) provides a trailer hitch platform and a 7-pin sealed connector at the rear bumper. A gooseneck/fifth-wheel bed-mounted 7-pin wiring harness (similar to UY2 harness) is also available and requires the Gooseneck/5th-Wheel Package (CMT).

Automatic Transmission Model Note All models are equipped with an engine oil cooler (KC4) and an oil-to-air transmission oil cooler (KNP).

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

Do not exceed the trailer weight rating.¹ For more information, ask your Chevrolet dealer.

SILVERADO 2500 HD AND 3500 HD FIFTH-WHEEL/GOOSENECK TRAILER WEIGHT RATINGS lb. (kg)¹

					CREW CAB									
ENGINE	AXLE RATIO	GCWR ²	GVWR	WHEEL SIZE	2500 HD STANDARD BED 2WD	2500 HD STANDARD BED 4x4	2500 HD LONG BED 2WD	2500 HD LONG BED 4x4	3500 HD STANDARD BED 2WD SRW	3500 HD STANDARD BED 4x4 SRW	3500 HD LONG BED 2WD SRW	3500 HD LONG BED 4x4 SRW	3500 HD LONG BED 2WD DRW	3500 HD LONG BED 4x4 DRW
6.6L V8 Gas	3.73	24,000 (10,886)	9900 (4490)	17"/18"	16,940 (7684)	-	-	-	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,150 (4604)	17"	16,940 (7684)	-	-	-	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,300 (4672)	17"	-	-	16,840 (7639)	-	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,450 (4740)	17"	-	16,650 (7552)	-	-	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,650 (4831)	17"	-	-	-	16,550 (7507)	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,350 (4695)	18"/20"	16,900 (7666)	-	-	-	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,500 (4763)	18"/20"	-	-	16,810 (7625)	-	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,650 (4831)	18"/20"	-	16,620 (7539)	-	-	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	10,850 (4921)	18"/20"	-	-	-	16,520 (7493)	-	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	11,000 (4990)	18"/20"	-	-	-	-	16,700 (7575)	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	11,150 (5058)	18"/20"	-	-	-	-	-	16,700 (7575)	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	11,350 (5148)	18"/20"	-	-	-	-	16,530 (7498)	-	-	-	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	11,500 (5216)	18"/20"	-	-	-	-	-	-	-	16,410 (7444)	-	-
6.6L V8 Gas	3.73	24,000 (10,886)	14,000 (6350)	17"	-	-	-	-	-	-	-	-	16,200 (7348)	16,180 (7339)

Fifth-Wheel/Gooseneck Kingpin Weight Notes Fifth-wheel or gooseneck kingpin weight should be 15% of total loaded trailer weight. The addition of trailer kingpin weight cannot cause vehicle to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). These ratings can be found on the certification label located on the driver door or doorframe. A fifth-wheel hitch is offered on specific models and is also available as a dealer-installed accessory on select models. See the Trailering Basics on page 6 for more trailering information.

Fifth-Wheel/Gooseneck Trailering Notes Silverado HD can be equipped with a fifth-wheel or gooseneck trailer hitch. Follow the manufacturer's directions for installation, but note that the hitch must be attached to the truck frame. Do not use the pickup bed for additional support. For proper kingpin tongue load distribution and control of the trailer, the hitch must be mounted so the kingpin load is placed

over, or slightly in front of, the rear axle centreline. Fifth-wheel trailer kingpin loads are higher than conventional trailer tongue loads, so pay careful attention to the truck's payload capacity and Rear Gross Axle Weight Rating. Your Chevrolet dealer can help you calculate the maximum allowable payload and GVWR required for your fifth-wheel trailering application. The weight of any additional equipment and all passengers must be subtracted from the payload weight to determine the maximum kingpin load available.

Gooseneck/5th-Wheel Package The Gooseneck/5th-Wheel Package (CMT)³ includes a hitch platform ready to accept a gooseneck ball or fifth-wheel hitch, a box-mounted trailer harness, a spray-on bedliner, and all the necessary box and bedliner holes drilled and capped.

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating. ³ Requires bumper hitch and spray-on bedliner. Not available with drop-in bed mat, drop-in bedliner or bed rug.

Do not exceed the trailer weight rating.¹ For more information, ask your Chevrolet dealer.

SILVERADO 2500 HD AND 3500 HD FIFTH-WHEEL/GOOSENECK TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	GVWR	WHEEL SIZE	CREW CAB										
					2500 HD STANDARD BED 2WD	2500 HD STANDARD BED 4x4	2500 HD LONG BED 2WD	2500 HD LONG BED 4x4	3500 HD STANDARD BED 2WD SRW	3500 HD STANDARD BED 4x4 SRW	3500 HD LONG BED 2WD SRW	3500 HD LONG BED 4x4 SRW	3500 HD LONG BED 2WD DRW	3500 HD LONG BED 4x4 DRW	
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	10,800 (4899)	17"	18,050 (8187)	-	-	-	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	11,000 (4990)	17"	-	-	17,880 (8110)	-	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	11,150 (5058)	17"	-	17,750 (8051)	-	-	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	26,000 (11,793)	11,350 (5148)	17"	-	-	-	17,590 (7979)	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	27,500 (12,474)	11,050 (5012)	18"/20"	18,500 (8392)	-	-	-	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	27,500 (12,474)	11,200 (5080)	18"/20"	-	-	18,500 (8392)	-	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	27,500 (12,474)	11,350 (5148)	18"/20"	-	18,500 (8392)	-	-	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	27,500 (12,474)	11,550 (5239)	18"/20"	-	-	-	18,500 (8392)	-	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	11,750 (5330)	18"/20"	-	-	-	-	21,500 (9752)	-	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	11,900 (5398)	18"/20"	-	-	-	-	-	-	21,330 (9675)	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	12,100 (5489)	18"/20"	-	-	-	-	-	21,300 (9662)	-	-	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	29,700 (13,472)	12,250 (5557)	18"/20"	-	-	-	-	-	-	-	21,040 (9544)	-	-	-
Duramax 6.6L V8 Turbo-Diesel	3.42	40,000 (18,144)	14,000 (6350)	17"	-	-	-	-	-	-	-	-	31,400 (14,243)	31,180 (14,143)	

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

Do not exceed the trailer weight rating.¹ For more information, ask your Chevrolet dealer.

COLORADO MAX. TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	MAX. GCWR ²	EXTENDED CAB 2WD	EXTENDED CAB 4x4	CREW CAB 2WD	CREW CAB 4x4
2.5L I-4	4.10	8500 (3856)	3500 (1588) ³	3500 (1588) ³	3500 (1588) ³	–
3.6L V6	3.42	8500 (3856)	3500 (1588) ³	3500 (1588) ³	3500 (1588) ³	3500 (1588) ³
3.6L V6 with Trailering Package	3.42	12,000 (5443)	7000 (3175)	7000 (3175)	7000 (3175)	7000 (3175)
Duramax 2.8L I-4 Turbo-Diesel	3.42	12,700 (5761)	–	7700 (3493)	7700 (3493)	7600 (3447)
3.6L V6 with Trailering Package (ZR2)	3.42	10,300 (4672)	–	5000 (2268)	–	5000 (2268)
Duramax 2.8L I-4 Turbo-Diesel (ZR2)	3.42	10,700 (4853)	–	5000 (2268)	–	5000 (2268)

Colorado Duramax 2.8L I-4 Turbo-Diesel Extended Cab models (except ZR2) are available for fleet and government orders only.

SUBURBAN/TAHOE TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	TAHOE 2WD	SUBURBAN 2WD	TAHOE 4WD	SUBURBAN 4WD
EcoTec3 5.3L V8 with Max Trailering Package	3.42	14,000 (6350)	8600 (3901)	8300 (3765)	8400 (3810)	8000 (3629)
EcoTec3 5.3L V8	3.08	12,000 (5443)	6600 (2994)	6300 (2858)	6400 (2903)	6000 (2722)
EcoTec3 6.2L V8	3.23	14,000 (6350)	8400 (3810)	8100 (3674)	8100 (3674)	7900 (3583)

When using a weight-carrying hitch, the maximum trailer weight is 5000 lb. (2268 kg) with a 600 lb. (272 kg) trailer tongue weight. A weight-distributing hitch and sway control are required for trailer tongue weights greater than 600 lb. (272 kg).

Notes on Colorado Trailer tongue weight should be 10% to 15% of total loaded trailer weight (up to 770 lb. [349 kg]). Addition of trailer tongue weight must not cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR).

Notes on Suburban and Tahoe Trailer tongue weight should be 10% to 15% of total loaded trailer weight (up to 1000 lb. [454 kg]). Addition of trailer tongue weight must not cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). The standard Heavy-Duty Trailering Package on Suburban and Tahoe includes an auxiliary external transmission oil cooler and engine oil cooler.

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner’s Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

³ Requires trailering equipment, available from Chevrolet Accessories.

Do not exceed the trailer weight rating.¹ For more information, ask your Chevrolet dealer.

TRAVERSE TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	FWD	AWD
3.6L DOHC V6 FWD	3.49	6725 (3050)	1500 (680)	–
3.6L DOHC V6 AWD	3.49	7055 (3200)	–	1500 (680)
3.6L DOHC V6 FWD with Trailing Equipment	3.49	10,250 (4650)	5000 (2268)	–
3.6L DOHC V6 AWD with Trailing Equipment	3.49	10,470 (4750)	–	5000 (2268)

When using a weight-carrying hitch, the maximum trailer weight is 5000 lb. (2268 kg) with a 500 lb. (227 kg) trailer tongue weight.

BLAZER TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	FWD	AWD
2.5L I-4 FWD	3.80	5787 (2625)	1500 (680)	–
2.0L Turbo DOHC I-4 FWD	3.47	6200 (2812)	1500 (680)	–
2.0L Turbo DOHC I-4 AWD	3.47	6200 (2812)	–	1500 (680)
3.6L DOHC V6 AWD	3.49	9250 (4196)	–	4500 (2041)

When using a weight-carrying hitch, the maximum trailer weight is 4500 lb. (2041 kg) with a 450 lb. (204 kg) trailer tongue weight.

EQUINOX TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	FWD	AWD
1.5L Turbo DOHC I-4 FWD	3.50	5247 (2380)	1500 (680)	–
1.5L Turbo DOHC I-4 AWD	3.87	5467 (2480)	–	1500 (680)
2.0L Turbo DOHC I-4 AWD	3.17	7694 (3490)	–	3500 (1588)

When using a weight-carrying hitch, the maximum trailer weight is 3500 lb. (1588 kg) with a 350 lb. (159 kg) trailer tongue weight.

Notes on Traverse Trailer tongue weight should be 10% to 15% of total loaded trailer weight (up to 500 lb. [227 kg]). Addition of trailer tongue weight must not cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). Maximum trailer weight rating requires factory-installed trailering equipment.

Notes on Blazer Trailer tongue weight should be 10% to 15% of total loaded trailer weight (up to 450 lb. [204 kg]). Addition of trailer tongue weight must not cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle

Weight Rating (GVWR). Maximum trailer weight rating requires factory-installed trailering equipment.

Notes on Equinox Trailer tongue weight should be 10% to 15% of total loaded trailer weight (up to 350 lb. [159 kg]). Addition of trailer tongue weight must not cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). Maximum trailer weight rating requires factory-installed trailering equipment.

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

Do not exceed the trailer weight rating.¹ For more information, ask your Chevrolet dealer.

EXPRESS PASSENGER VAN TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	2500	3500	3500 EXTENDED WHEELBASE
4.3L V6	3.42	13,000 (5897)	6700 (3039)	6700 (3039)	6300 (2858)
Vortec™ 6.0L V8	3.42	16,000 (7258)	9600 (4355)	9600 (4355)	9200 (4173)
Duramax 2.8L I-4 Turbo-Diesel	3.42	13,000 (5897)	6300 (2858)	5700 (2585)	5300 (2404)

When using a weight-carrying hitch, the maximum trailer weight is 5000 lb. (2268 kg) with a 400 lb. (181 kg) tongue weight. A weight-distributing hitch and sway control are required for trailer weights greater than 5000 lb. (2268 kg).

EXPRESS CARGO VAN TRAILER WEIGHT RATINGS lb. (kg)¹

ENGINE	AXLE RATIO	GCWR ²	2500	2500 EXTENDED WHEELBASE	3500	3500 EXTENDED WHEELBASE
4.3L V6	3.42	13,000 (5897)	7400 (3357)	7100 (3221)	7400 (3357)	7200 (3266)
Vortec 6.0L V8	3.42	16,000 (7258)	10,000 (4536)	10,000 (4536)	10,000 (4536)	10,000 (4536)
Duramax 2.8L I-4 Turbo-Diesel	3.42	13,000 (5897)	7000 (3175)	6100 (2767)	6200 (2812)	6000 (2722)

When using a weight-carrying hitch, the maximum trailer weight is 5000 lb. (2268 kg) with a 400 lb. (181 kg) tongue weight. A weight-distributing hitch and sway control are required for trailer weights greater than 5000 lb. (2268 kg).

Notes on Express Trailer tongue weight should be 10% to 15% of total loaded trailer weight (up to 400 lb. [181 kg] with weight-carrying hitch and up to 1000 lb. [454 kg] with weight-distributing hitch). Addition of trailer tongue weight cannot cause vehicle weights to exceed Rear Gross Axle Weight Rating (RGAWR) or Gross Vehicle Weight Rating (GVWR). The standard base cooling system includes all content required to attain the maximum trailer weight rating. No optional cooling equipment is available. The Heavy-Duty Trailering Equipment Package (Z82) includes trailer hitch platform and 7-wire trailer wiring harness.

¹ Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow. ² Gross Combination Weight Rating.

SILVERADO 1500 BOX DELETE

ENGINE	AXLE RATIO	GCWR lb. (kg) ¹
4.3L V6	3.42	12,800 (5806)
5.3L V8	3.42	15,000 (6804)

Available on Regular Cab WT.

SILVERADO 2500 HD BOX DELETE

ENGINE	AXLE RATIO	GCWR lb. (kg) ¹
6.6L V8 gas	3.73	24,000 (10,886)
Duramax 6.6L V8 Turbo-Diesel (Regular Cab, Double Cab)	3.42	26,000 (11,793)
Duramax 6.6L V8 Turbo-Diesel (Crew Cab with 17" wheels)	3.42	26,000 (11,793)
Duramax 6.6L V8 Turbo-Diesel (Crew Cab with 18" or 20" wheels)	3.42	27,500 (12,474)

Available on Long Bed, Regular Cab, Double Cab and Crew Cab WT, LT and LTZ. LTZ not available with Regular Cab model.

SILVERADO 3500 HD BOX DELETE

ENGINE	AXLE RATIO	GCWR lb. (kg) ¹
6.6L V8 gas	3.73	24,000 (10,886)
Duramax 6.6L V8 Turbo-Diesel (SRW)	3.42	29,700 (13,472)
Duramax 6.6L V8 Turbo-Diesel (DRW)	3.42	40,000 (18,144)

Available on Long Bed WT, LT and LTZ. LTZ not available with Regular Cab and Double Cab models.

Notes on Silverado Box Delete and Express Cutaway: Gross Combination Weight Ratings Chevrolet engineers perform extensive testing of acceleration, handling, braking, and thermal and structural performance to determine the Gross Combination Weight Rating (GCWR) for your vehicle. The GCWR is the total allowable weight of the completely loaded vehicle and trailer including any passengers, cargo, equipment and conversions. You should not exceed the GCWR of your vehicle when you tow a trailer.

Because the GCWR is calculated for a line of vehicles, rather than an individual load situation, some standardized assumptions are made. First, the base curb weight of that type of vehicle is used (the weight of a standard equipped vehicle without any options). Second, it is assumed that there is only one person in the vehicle (the driver), who weighs 150 lb. (68 kg).

SILVERADO 3500 HD CHASSIS CAB

ENGINE	AXLE RATIO	GCWR lb. (kg) ¹
6.6L V8 gas	3.73	24,000 (10,886)
Duramax 6.6L V8 Turbo-Diesel	3.42	40,000 (18,144)

Available on Regular Cab and Crew Cab.

EXPRESS CUTAWAY

ENGINE	AXLE RATIO	GCWR lb. (kg) ¹
4.3L V6	3.42	13,000 (5897)
Vortec 6.0L V8	3.42	16,000 (7258)
	3.73	16,000 (7258)
	4.10	20,000 (9072)

Available on 3500 or 4500 models.

¹ Gross Combination Weight Rating.

DINGHY (FLAT) TOWING CAPABILITY

	BLAZER	BOLT EV	CAMARO	COLORADO	CORVETTE	EQUINOX	EXPRESS
2WD	Yes	No	No	No	No	Yes	No
4x4/4WD	–	–	–	Yes	–	–	–
AWD	Yes	–	–	–	–	No	–

	MALIBU	SILVERADO	SPARK	SUBURBAN	TAHOE	TRAVERSE	TRAX
2WD	Yes ¹	No	Yes ³	No	No	Yes	No
4x4/4WD	–	Yes ²	–	Yes ²	Yes ²	–	–
AWD	–	–	–	–	–	Yes	No

Dinghy Towing Many motor home drivers like to dinghy-tow a smaller vehicle as they travel. The chart above shows which Chevrolet vehicles can be dinghy-towed without a dolly or trailer and with all four wheels on the ground. Rear-wheel-drive vehicles should not be dinghy-towed. Towed vehicles (or dollies or trailers carrying them) should have a separate functional braking system.

Dinghy Towing Setup Procedure Use extra caution whenever towing another vehicle. Do not exceed the towing vehicle's ratings such as the Gross Combination Weight Rating (GCWR) by adding the weight of the dinghy-towed vehicle or vehicle damage may result.

¹ Requires available 2.0L engine. ² Requires available 2-speed transfer case. ³ With manual transmission only.

Trailer With Your Chevrolet Chevrolet vehicles are built strong and durable to handle the demands of trailering. Certain equipment that prepares a Chevrolet vehicle for trailering is standard: a large fuel tank, a high-capacity alternator and a front stabilizer bar. For other available trailering-related equipment, talk to your dealer. You'll need a hitch, of course, and many hitch types are available, either as factory equipment or from your dealer. In addition, if you plan to tow frequently, you should equip your Chevrolet vehicle with the available Trailering Package. This package includes a trailer hitch platform and an electrical harness. Also required with this package are a hitch ball, a mounting head, and possibly weight-distributing and anti-sway assemblies; these are available through aftermarket sources. Please carefully review your Chevrolet vehicle Owner's Manual for important safety information about trailering with your vehicle.

Words About This Guide We have tried to make this guide comprehensive and factual. We reserve the right, however, to make changes at any time and without notice in prices, colours, materials, equipment, specifications, models and availability. Information may have been updated since the time of posting. Please check with your Chevrolet dealer for complete details. Chevrolet reserves the right to lengthen or shorten the model year for any product for any reason, or to start and end model years at different times. Chevrolet vehicles are equipped with engines produced by GM Propulsion Systems or other suppliers to General Motors worldwide. The marks appearing in this brochure including, but not limited to, General Motors, GM, Chevrolet, the Chevrolet emblem, Blazer, Bolt EV, Camaro, Colorado, Corvette, Equinox, Express, Malibu, Silverado, Spark, Suburban, Tahoe, Traverse and Trax and their respective logos, emblems, slogans and vehicle model names and body designs; and other marks such as Duramax, EcoTec3, myChevrolet, OnStar, the OnStar emblem, StabiliTrak and Vortec are trademarks of General Motors LLC and/or General Motors of Canada Company, its subsidiaries, affiliates or licensors. ©2020 General Motors. All rights reserved.

